

ISO 9001: 2000 Certified



MARVEL MANUFACTURING COMPANY, INC.
3501 Marvel Drive
Oshkosh, WI 54902
band saw Website

Official **marvel**

MANUFACTURING COMPANY, INC.
Fax (920) 236-7209

Phone (920) 236-7200

Welcome to the official Marvel® Mfg. Co., Inc. Website. Home of the Marvel Metal Cutting Bandsaw and the official Marvel Band Saw Part source for the Industrial Vertical Band Saw and the Horizontal Band Saw.

- Home
- Up

MARVEL 8 MARK II

Series 8 Mark II - Our most popular bandsaw, a truly universal machine capable of making virtually any conceivable straight or miter cut (45° right & left).

NEW!

Marvel 8 Mark III 60° Tilt Both Ways

- 3° And Straight Column in one machine
- Patent pending Easy Load Guide Blocks
- Optional Power Tilt



[Click Here for more details.](#)

High Column also available

Marvel TouchTech60 Saws now with servo driven shuttle. Available in 4 , 8 , 13 & 18 Foot shuttle Lengths. Click Below for Details.





New Metal Bandsaw


Horizontal Capacity	Standard Column 18" (457mm) High Column 18" (457mm)
Vertical Capacity	Standard Column 22"(560mm) High Column 28"(712mm)
Vertical Capacity @45 Deg.	Standard Column 12 1/2"(324mm) High Column 17"(432mm)
Blade Dimensions	Standard Column 14'-6" (4420mm) High Column 15'-6" (4724mm)
Wheel Diameter	18" (457mm)
Max. Vise Opening	21" (533mm)
Coolant Motor	1/4 HP (.2 kw)

Coolant Capacity	20 Gal. (78L)
Blade Drive Motor	2 HP (1.5 kw)
Blade Speed	50-450 FPM (15-137 M/MIN)
Feed Force	0-140 lbs (0-64 kg)
Shipping Weight	2,870 lbs (1300 kg)

QUICK, EASY BLADE INSTALLATION The hinged upper band wheel cover and blade guard swing out of the way to allow easy, unobstructed installation of the band blade.

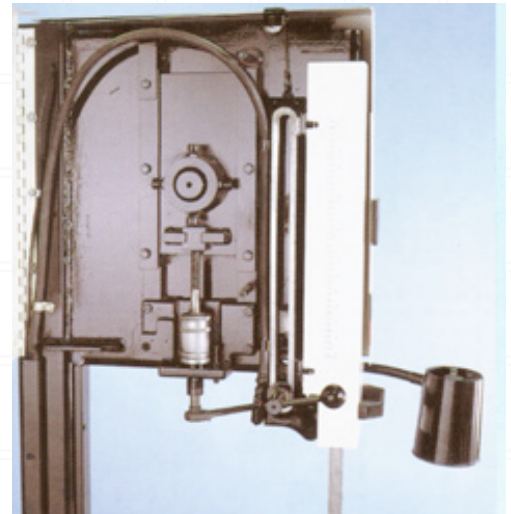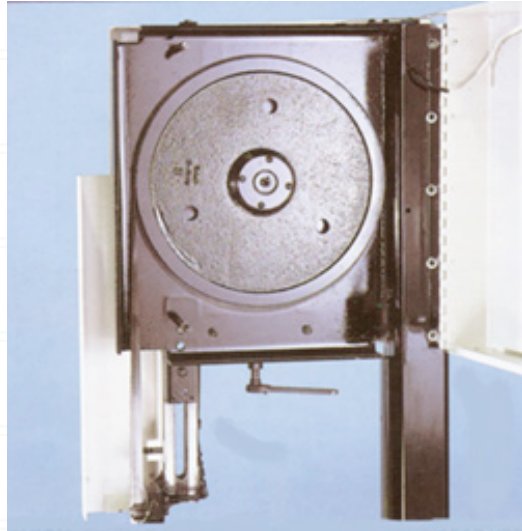


AUTOMATIC BLADE TENSIONING Once the band is in place, a few strokes on the ratchet handle (until it comes to a stop) apply correct tension on the blade. Four alignment screws on the band wheel allow proper alignment of the wheel for correct blade tracking.

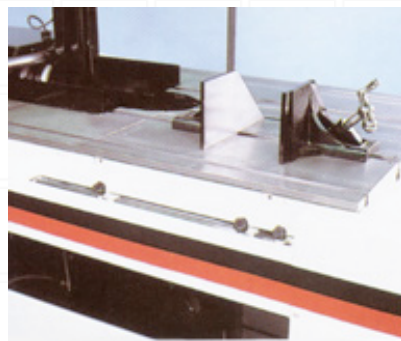


AUTOMATIC COLUMN TRAVERSE STOPS Stop dogs on the Mark II can be set to limit the forward and return travel of the saw's column. This feature considerably speeds cutting cycles when the full 18" travel of the column is not required for the sawing being done.

IMPROVED CHIP CONTROL The Series 8 Mark II has a chip control system that cleans the blade and collects chips for easy removal. A powered wire brush and two coolant jets wash chips off the band blade immediately after

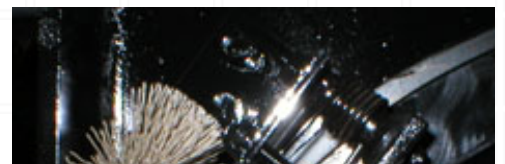

it leaves the cut. A deflector mounted on the base of the column minimizes chip accumulation and interference with the saw operation.

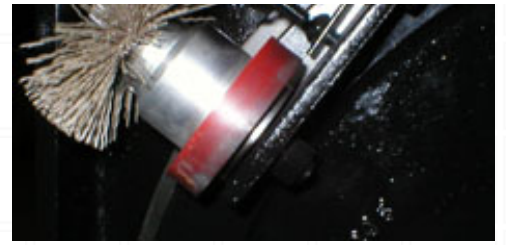

[\[Home\]](#) [\[Up\]](#)

Site Search

Search

powered by Google



WWW



Sawing.com

Questions or comments please see our [contact page](#).

No part or parts of this site may reproduced on any other sites without written permission of Marvel® Manufacturing, Inc.

Copyright © 2006 Marvel Manufacturing Inc. All rights reserved.

Note: Options, specifications, prices and webpage content subject to change without notice.

Warning: Machine guarding removed for illustration proposes only. Always read the operation manual for proper machine operation.

This site is best viewed with Internet Explorer 6.x and a screen resolution of 1024x768