



Ink Jet Marker

Fast, quiet marking with no damage to the plate surface

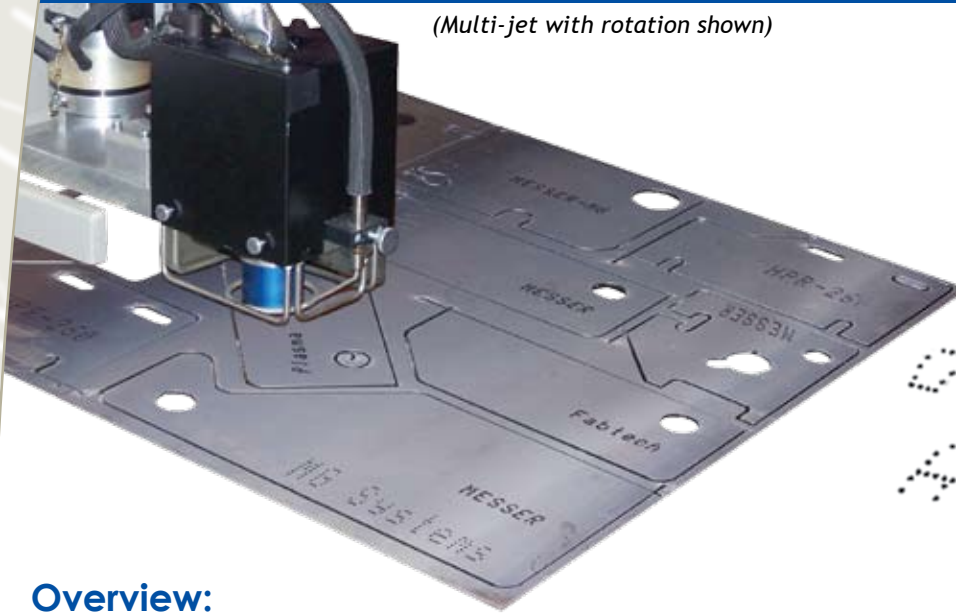

(Multi-jet with rotation shown)

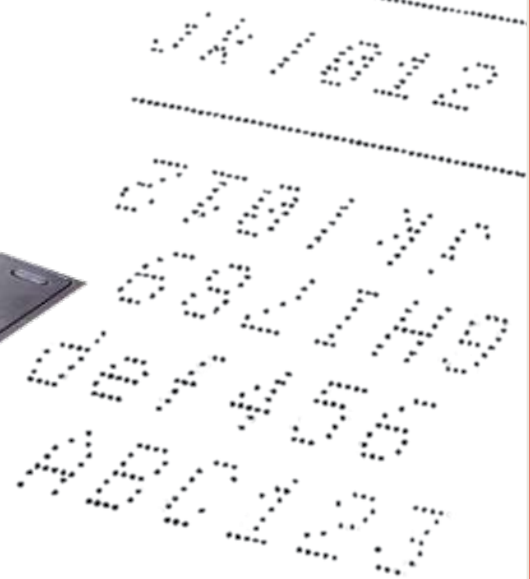

Overview:

The basic Ink Jet Marker provides fast and quiet alphanumeric labeling with printing in one direction of travel, in addition to line and contour marking for showing bend lines and feature locations. The enhanced version adds a rotation axis to allow text and lines to be oriented at any angle on the surface being marked.

The Multi-jet Ink Jet Marker uses a 7 dot head to provide highly legible characters up to 27mm (1 inch) tall at speeds up to 17 characters per second. This marker is especially designed to work in the hot, dusty and humid environments encountered in fabricating applications, with an operating temperature range of -5°C to + 45°C and a humidity range of 10% to 90% RH.

Available in 3 Models

1. **Single jet** for line and arc marking.
2. **Multi-jet (7) fixed** primarily for alphanumeric text in one direction with single character height; can also mark lines and arcs.
3. **Multi-jet (7) with rotation** primarily for alphanumeric text in different directions with variable character height; can also mark lines and arcs.



Features and Benefits:

- Dye based Ink MEK (Methyl Ethyl Ketone)
- Will not wipe off with water
- Black ink only
- Dries in 3-5 seconds
- Character height available at 9, 12, 18, 24 or 27 mm with multi-jet models

Application:

Available on TMC4500ST, MPC2000, Titan II and MetalMaster Plus machine models.

(Single-jet shown)

MESSER 
MG Systems &
Welding, Inc.

MG Systems
Your Productivity Process People®

The descriptions, technical data, and illustrations contained in this document are provided for guidance purposes only and are non-binding. The manufacturer reserves the right to make alterations to products without notice.
© 2006 Messer MG Systems & Welding 12061M

OPTIONS

TABLES

CONTROLS

CUTTING MACHINES